




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/26	A1	(11) International Publication Number: WO 99/04573 (43) International Publication Date: 28 January 1999 (28.01.99)
(21) International Application Number: PCT/IB98/00838 (22) International Filing Date: 29 May 1998 (29.05.98) (30) Priority Data: 97401719.6 16 July 1997 (16.07.97) EP (34) Countries for which the regional or international application was filed: FR et al. (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: BAGNI, Daniele; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). TONO, Stefano; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: LANDOUSY, Christian; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).	(81) Designated States: JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: VIDEO CODING METHOD AND DEVICE, AND CORRESPONDING DECODING DEVICE

(57) Abstract

The invention relates to a low/very low bit rate video coding method fully compatible with the H.263 standard and comprising a first forward coding step, a second backwards prediction step, and a third decision step including a selection sub-step between so-called intra and inter coding modes. This decision step controls in said intra coding mode a down-conversion filtering sub-step, carried out at the beginning of the coding step and allowing to code and transmit original intra pictures with a lower resolution, and a corresponding up-conversion filtering sub-step, carried out in the prediction step. IN the receiving terminal, the decoder recognizes the reduced format of the pictures and up-scales them. Application: videophone and video conference.

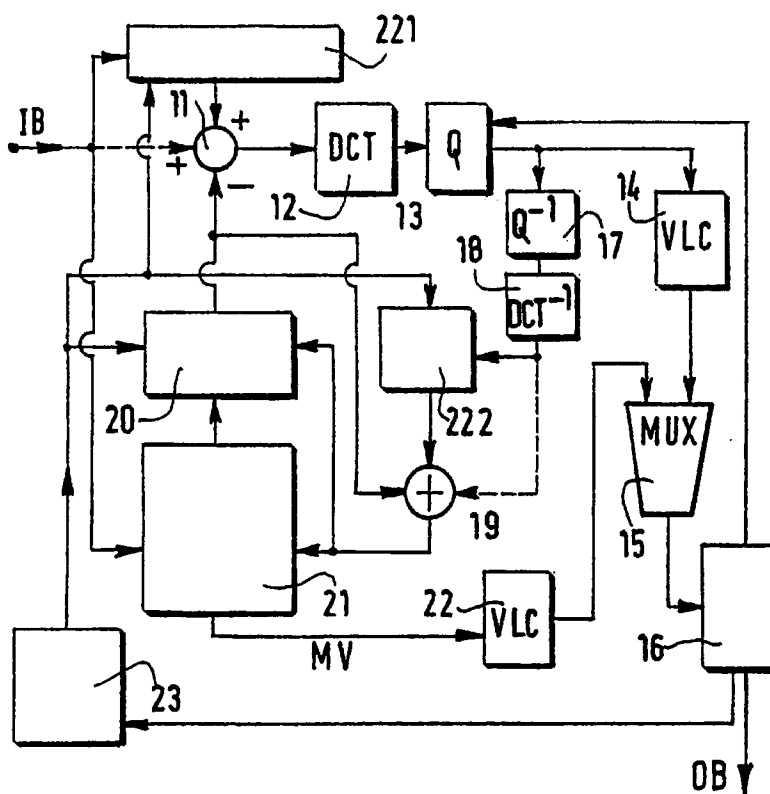

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

"Video coding method and device, and corresponding decoding device".

FIELD OF THE INVENTION

The present invention relates to a video coding method comprising :

- a first coding step including in series at least an orthogonal transform sub-step, a quantization sub-step, and a variable length coding sub-step ;

5 - a second prediction step including in series, between the output of said quantization sub-step and the input of the coding step, at least an inverse quantization sub-step, an inverse orthogonal transform sub-step, and a prediction sub-step ;

- a third decision step including a selection sub-step between so-called intra and inter coding modes. It also relates to a corresponding video coding device, to a coded video signal such as available at the output of such a coding device, to a storage
10 medium for memorizing said signal, and to a corresponding decoding device. This invention may be used in the field of videophony and video conferencing.

BACKGROUND OF THE INVENTION

The standard H.263 for very low bitrate video coding, described for
15 instance in "ITU standardisation of very low bitrate video coding algorithms", K. Rijkse, Signal

Processing : Image Communication, 7(1995), pp.553-565, is based on a hybrid video coding method dealing with macroblock structured pictures and using techniques such as DCT (Discrete Cosine Transform), to reduce the spatial redundancy, motion estimation and inter-
20 picture prediction, to reduce spatial redundancy, and finally quantization variable length entropy coding (as also provided in the case of the MPEG-2 standard).

The maximum bitrate for this standard H.263 is about
20 kbits/s for videophone and an integer multiple of 64 kbits/s (such as 64, 128, 256,...) for video conference. At these very low bitrates, various kinds of solution are often used in
25 order to reduce the transmitted bitrate, for instance a temporal sub-sampling. These solutions must however be implemented without degrading the picture quality.

A block diagram of the standard H.263 encoder is shown in Fig.1. The input bitstream IB corresponding to the images to be coded is received by the first positive input of a subtracter 11. This subtracter is followed in series by an orthogonal transform

device such as a DCT circuit 12, a quantizer 13 (Q), a variable length coding (VLC) circuit 14, a video multiplexer 15 (MUX), and an output buffer 16 that yields an output bitstream OB. An interpicture prediction loop, provided between the output of the quantizer 13 and the second negative input of the subtracter 11 comprises in series an inverse quantizer 17 (Q^{-1}),
 5 an inverse DCT circuit 18 (DCT^{-1}), an adder 19, a prediction circuit 20, the output of which is also sent back to the second input of the adder 19 for the reconstitution of a complete image at the output of said adder, and the subtracter 11.

The output of the adder 19 is sent to a motion estimator 21 that also receives the input bitstream IB and yields motion vectors MV. These vectors are then coded
 10 by a second VLC circuit 22 and sent to the multiplexer 15 for transmission (or storage). A decision circuit 23 provided between the output buffer 16 and the prediction circuit 20 allows to choose between an intra coding mode, concerning only the first picture of the video sequence, which is then coded without temporal prediction, and an inter coding mode, according to which all the remaining pictures are coded using prediction.

15 As the intra pictures are coded without any reference to any previous picture, each of them needs from 4 to 10 times (depending on the scene content and on the average quantization parameter) the amounts of bits necessary to code the subsequent pictures in inter mode. The following table (= Table 1) illustrates, for some well known test sequences in CIF format (288 lines of 352 pixels), the difference in terms of bits between
 20 intra and inter modes :

	CIF sequences	intra mode	inter mode
	Miss America	35568	3936
	Claire	37224	3496
	Renata	149984	34736
25	Flower Garden	180456	63512
	Foreman	67736	13016
	Teeny	67344	38968
	Interview	106320	11272

The values of these amounts of bits necessary to code the first picture in intra mode and the
 30 second subsequent picture in inter mode lead to observe that the output buffer 16, necessary to transmit the output stream OB at constant bitrate, is strongly used during the intra coding. A buffer with a proper capacity might be used in order to store an intra picture without any risk of overflow, but the delay of the encoder is directly proportional to the total bit number of the first intra picture : the larger the number of bits of this picture, the larger the delay to

empty the output buffer at the concerned constant target bitrate.

SUMMARY OF THE INVENTION

It is therefore an object of the invention to propose a coding method
5 allowing to avoid any risk of overflow when coding according to the intra mode.

To this end the invention relates to a coding method as described in the
preamble of the description and characterized in that said third decision step also includes,
only in said intra coding mode, a down-conversion filtering sub-step, carried out at the
beginning of the coding step, and a corresponding up-conversion filtering sub-step, carried
10 out in the prediction step, just before the prediction sub-step itself, said down-conversion
allowing to code pictures with a reduced picture format with respect to the format of the
pictures coded according to the inter coding mode.

The introduction of these additional steps constitutes a very simple and
effective solution to save bits, with an average computational reduction of about 30 % and a
15 decreased encoding delay because of the less bit occupation of the output buffer (and of said
reduced computational effort). Although not standardized, this solution is compatible with the
standard H.263. Tests have been performed in the range of 64-256 kbits/sec. target bitrates,
with 5 Hz picture rate and CIF format, and with either a very simple buffer control strategy
or a very complex one (based on a pre-analysis), and show that the solution is efficient,
20 without noticeable degradation of the final quality. Moreover, said solution is totally
scalable, even if particularly adapted to low bitrate applications (less than or equal to 256
kbits/sec.) for which the requirements of high compression ratios and acceptable quality are
more difficult to achieve.

25 BRIEF DESCRIPTION OF THE DRAWINGS

The particularities and advantages of the invention will become more
apparent from the following description and the accompanying drawings, in which:

- Fig.1 shows, as already said, a block diagram of the standard H.263
encoder ;

30 - Fig.2 shows a block diagram of an encoder according to the invention,
and Fig.3 a corresponding decoding device.

DESCRIPTION OF PREFERRED EMBODIMENTS

The principle of this invention is the following. Instead of coding the first

picture of the sequence in a given format, for instance in CIF format, according to the intra mode, and then transmitting it after quantization and entropy coding steps, this original picture is spatially down-converted to a lower resolution, for instance to QCIF resolution (144 lines of 176 pixels) in a down-converter 221 that, as illustrated in Fig.2 showing an
5 encoder according to the invention (the identical circuits have the same references as in Fig.1), is connected to the input IB of the encoder. The output of said down-converter 221 is sent towards the subtracter 11 and constitutes its positive input (in place of the direct input IB in the other cases, i.e. when pictures are not coded according to the intra mode). Said converter is for instance a half-band bidimensional filter with 15 taps and odd symmetry,
10 but, in order to save computational efforts, a filter with a lower number of taps (for instance seven) may also be used, obtaining practically the same quality. Whatever this filtering step, this down-converted picture (in QCIF format) will be coded according to the intra mode and then transmitted in the output bitstream.

In the encoder, the QCIF picture present at the output of the inverse DCT
15 circuit 18 of the prediction loop is spatially up-converted to CIF format in an up-converter 222, in order to be used to predict the following pictures of the sequence. The output of said up-converter 222 is sent towards the adder 19 and constitutes its first input (in place of the direct connection between the circuit 18 and the first input of said adder as shown in Fig.1).

A decision circuit 223, provided as previously between the output buffer
20 16 and the prediction circuit 20, allows first to choose (as previously) between the intra mode and the inter mode and secondly to replace on the positive input of the subtracter 11, only in intra mode, the direct connection coming from the encoder input by a connection coming from the output of the down-converter 221, and, on the input of the adder 19, the connection coming directly from the inverse DCT circuit 18 by a connection coming from
25 the output of the up-converter 222.

The output bitstream OB is therefore composed, according to the invention, of a stream of data corresponding to QCIF pictures for the pictures coded in intra mode and to CIF pictures for pictures not coded in intra mode. To said intra and inter coded data, an additional information is associated for indicating the selected coding mode of the
30 data (i.e. which data have been coded with a reduced picture format and which data have been coded according to the inter coding mode), as recommended by the H.263 standard, in the specification of its bitstream syntax. This output bitstream may be stored, or transmitted either in order to be memorized in a storage medium provided to this end or in order to be decoded.

A decoding device, provided to this end and shown in Fig.3, comprises a first decoding channel including in series a variable length decoding circuit 31, an inverse quantizing circuit 32 and an inverse discrete cosine transform circuit 33, followed by a second motion compensation channel including a picture memory 34, a motion compensation circuit 35, and an adder 36 receiving the outputs of said inverse discrete cosine transform circuit 33 and motion compensation circuit 35. The output of the adder 36 is both the output of the decoding device and the input of the picture memory 34. When the decoding device recognizes, thanks to a detecting circuit 38, the intra coding mode associated to the pictures coded according to the reduced picture format (QCIF in the described example), it performs in an up-converter 39 a spatial up-conversion from said reduced format to the original one (CIF in the described example), the direct connection between the input of the decoding device and the circuit 31 being then replaced by the connection between the output of the up-converter 39 and the input of said circuit 31.

The tests that have been carried out show that, although the quality of the coded intra pictures is less than the quality of the original pictures, when displaying in real time the whole video sequence, the degradation of this quality is masked by the subsequent better quality of the other pictures coded in inter mode. After few inter pictures (generally four or five), it is practically no longer possible to distinguish between the original sequence and the sequence processed according to the invention. The same behaviour can be objectively demonstrated by PSNR (Peak Signal to Noise Ratio) and MSE (Mean Square Error) luminance measurements for some of the above indicated test sequences :

num.picture	Original encoder		INTRA down-up encoder	
	SNR	MSE	SNR	MSE
1 (INTRA)	34.90	21.04	27.69	110.73
2 (P-INTER)	32.33	38.00	32.18	39.39
3	30.44	58.78	30.30	60.72
4	30.77	54.45	30.65	55.98
5	31.80	43.01	31.70	43.96
6	31.04	51.15	30.95	52.26
7	30.56	57.14	30.53	57.60
8	29.29	76.63	29.23	77.65
9	28.88	84.06	28.87	84.36
10	28.36	94.85	28.33	95.56
11	29.20	78.17	29.20	78.24

SNR and MSE luminance measurements, in Teeny.

num.picture	Original encoder		INTRA down-up encoder	
	SNR	MSE	SNR	MSE
1 (INTRA)	34.07	25.45	28.61	89.57
2 (P-INTER)	32.33	37.70	31.21	49.19
3	32.26	38.68	31.58	45.16
4	31.98	41.22	31.50	46.03
5	32.06	40.49	31.70	43.98
6	31.76	43.39	31.54	45.65
7	31.93	41.67	31.77	43.24
8	31.89	42.07	31.79	43.08
9	31.78	43.20	31.72	43.74
10	31.91	41.89	31.86	42.40
11	32.04	40.62	32.03	40.78

SNR and MSE luminance measurements, in Foreman.

num.picture	Original encoder		INTRA down-up encoder	
	SNR	MSE	SNR	MSE
1 (INTRA)	30.75	54.73	22.92	332.25
2 (P-INTER)	27.97	103.85	27.03	128.88
3	27.54	114.67	27.00	129.61
4	27.10	126.83	26.82	135.32
5	26.74	137.85	26.56	143.47
6	26.26	153.87	26.19	156.31
7	26.02	162.58	25.97	164.46
8	25.98	163.93	25.94	165.70
9	25.79	171.48	25.74	173.26
10	25.64	177.62	25.55	180.99
11	25.24	194.50	25.17	197.81

SNR and MSE luminance measurements, for Renata.

- 15 (the concerned test sequence is mentioned under the corresponding table).

Examples are given hereunder of some results of said tests (in numbers of bits), for the same sequences "Teeny", "Foreman" and "Renata" :

(a) "Teeny"

		original intra	reduced intra
20	picture I	67344	23984
	" " P	38968	46112
	" " P	28928	28720
	" " P	19440	19552
	" " P	34872	34960
25	total amount :	189552	153328

(b) "Foreman"

		original intra	reduced intra
	picture I	67736	25480
	" " P	13016	22176
30	" " P	9152	11928
	" " P	9552	10880
	" " P	10952	11408

total amount :	110408	81872
(c) "Renata"		
	original intra	reduced intra
picture I	149984	35472
" " P	34736	72552
" " P	28112	31784
" " P	28376	30192
" " P	26280	27504
total amount :	267488	197504

10 These tables indicate comparisons between the total number of bits necessary to code the initial five pictures of every sequence (for the remaining pictures that follow these ones, the amount of bits is almost equal), and show that a remarkable amount of bits is saved during these first pictures. Moreover, as the H.263 video coding standard can operate on five picture formats (sub-QCIF = 96 lines of 128 pixels ; QCIF ; CIF ;

15 4CIF = 576 lines of 704 pixels ; 16 CIF = 1152 lines of 1408 pixels), the invention can also be applied with the same results and benefits to the 16CIF (with down-conversion to 4CIF), to the 4CIF (down-conversion to CIF), and so on, according to its completely scalable feature. In the case of 20 kbit/s videophony with QCIF pictures, sub-QCIF sizes are not properly half the dimensions of QCIF (in fact one has 128 pixels and 96 lines instead of

20 88 and 72). Down-converting from QCIF to sub-QCIF, before intra coding, would not produce the same "bit saving and lower delay" effect than in the other higher resolution cases. It is then proposed to use "half-QCIF" instead of sub-QCIF format. The "half-QCIF" sizes are 88 pixels and 72 lines and again this format can be obtained by the same 15 taps bi-dimensional filter. As it is not a standard format, the two concerned intra down-up terminals

25 can signal the half-QCIF as it was a "normal" sub-QCIF, in other words : once the intra down-up feature is recognized and used by the two terminals working at QCIF resolution, when the decoder reads from the intra header the sub-QCIF source format declaration, it recognizes to be in front of a half-QCIF picture and it performs a spatial up-conversion from half-QCIF to QCIF size after the inverse DCT calculation.

CLAIMS :

1. A video coding method comprising :

- a first coding step including in series at least an orthogonal transform sub-step, a quantization sub-step, and a variable length coding sub-step ;
- a second prediction step including in series, between the output of said quantization sub-step and the input of the coding step, at least an inverse quantization sub-step, an inverse orthogonal transform sub-step, and a prediction sub-step ;
- a third decision step including a selection sub-step between so-called intra and inter coding modes ;

wherein said third decision step also includes, only in said intra coding mode, a down-conversion filtering sub-step, carried out at the beginning of the coding step, and a corresponding up-conversion filtering sub-step, carried out in the prediction step, just before the prediction sub-step itself, said down-conversion allowing to code pictures with a reduced picture format with respect to the format of the pictures coded according to the inter coding mode.

2. A video coding method according to claim 1, wherein said reduced picture format is the so-called format QCIF of 176 pixels x 144 lines, the format in inter coding mode being the format CIF of 352 pixels x 288 lines.

3. A video coding device comprising :

- a first coding channel, including in series a discrete cosine transform circuit, a quantizer, a variable length coding circuit, a multiplexer and an output buffer ;
- a second prediction channel, including in series between the output of said quantizer and the input of said discrete cosine transform circuit an inverse quantizer, an inverse cosine transform circuit, an adder, a prediction circuit and the negative input of a subtracter ;

- a third decision channel, including a decision circuit inserted between the output of the buffer and the prediction circuit and provided for a selection between so-called intra and inter coding modes ;

characterized in that said decision channel also comprises :

(a) a down-converter, inserted between the input of the encoder and the positive input of said subtracter ;

(b) an up-converter, inserted between the output of said inverse cosine transform circuit and the input of the adder, both down-converter and up-converter being
5 controlled by said decision circuit in order to be active, in place of corresponding direct connections, only when said intra coding mode is selected.

4. A coded signal as obtained at the output of a video coding device comprising a first coding channel and a prediction channel, a decision branch being further provided in order to select between so-called intra and inter coding modes of the input video
10 signals, said coded signal comprising a bitstream composed from intra and inter coded data and an associated information about said coding mode, said intra coded data corresponding to pictures coded with a reduced picture format with respect to the format of the pictures coded according to the inter coding mode.

5. A storage medium for storing a coded signal as obtained at the output of a
15 video encoder comprising a first coding channel and a prediction channel, a decision branch being further provided in order to select between so-called intra and inter coding modes of the input video signals, said coded signal comprising a bitstream composed from intra and inter coded data and an associated information about said coding mode, said intra coded data corresponding to pictures coded with a reduced picture format with respect to the format of
20 the pictures coded according to the inter coding mode.

6. A device for decoding a coded video signal according to claim 4, said device comprising a first decoding channel including in series a variable length decoding circuit, an inverse quantizing circuit and an inverse discrete cosine transform circuit, followed by a second motion compensation channel including a picture memory, a motion
25 compensation circuit, and an adder receiving the outputs of said inverse discrete cosine transform circuit and motion compensation circuit, said decoding device being further characterized in that it comprises a detecting circuit, for recognizing the intra coding mode, and an up-converter, for performing, only in said intra mode, the conversion from said reduced picture format to the picture format according to the inter coding mode.

1/2

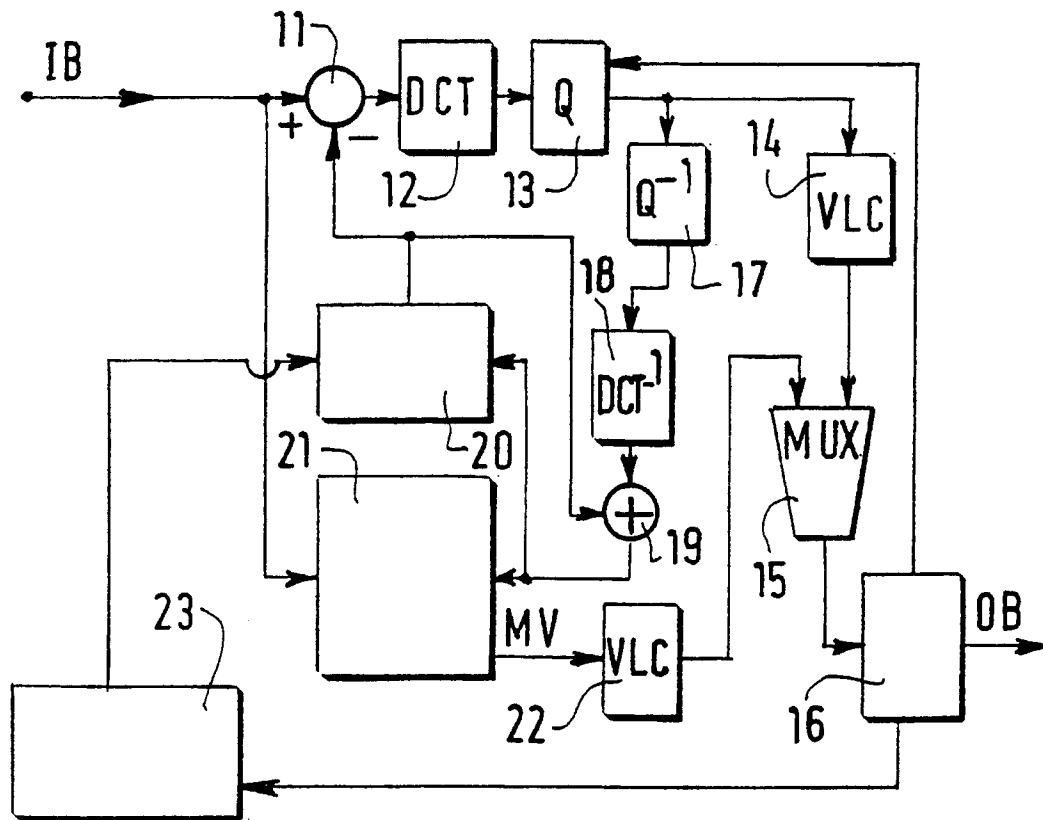


FIG.1

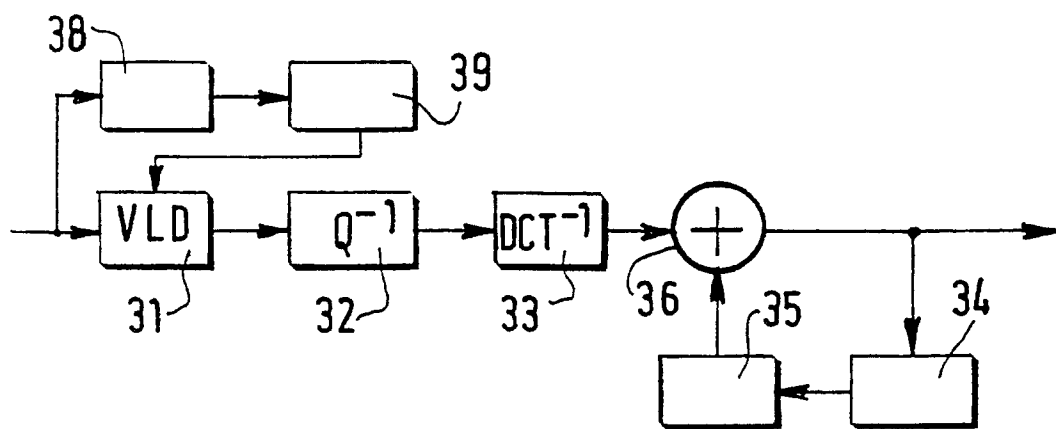


FIG.3

2/2

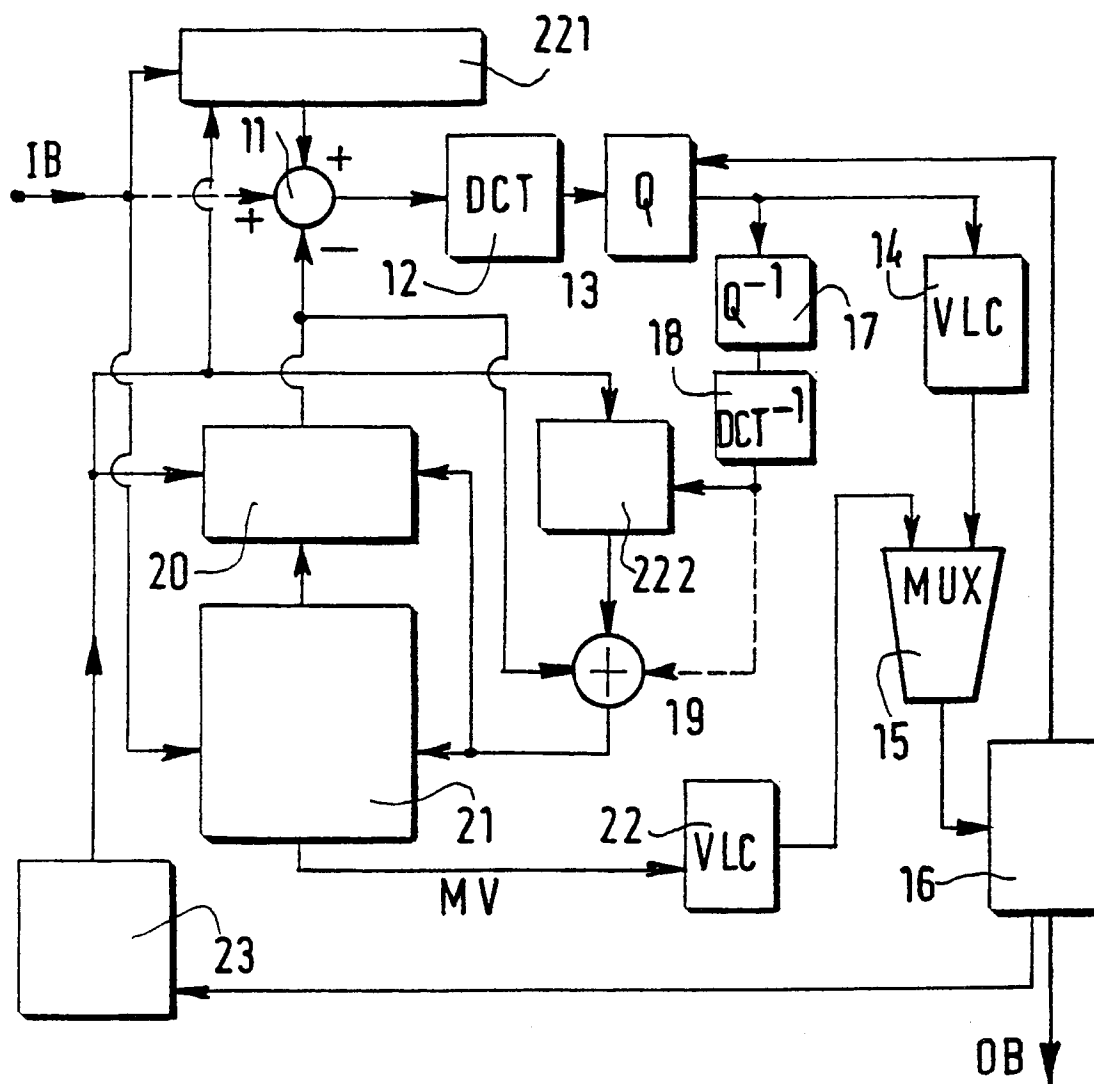


FIG.2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/00838

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04N 7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04N, G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 9613128 A1 (THOMSON CONSUMER ELECTRONICS, INC.), 2 May 1996 (02.05.96), page 4, line 17 - page 5, line 5; page 17, line 36 - page 19, line 23, see "summary of the invention"	1-6
	--	
Y	EP 0631441 A2 (CANON KABUSHIKI KAISHA), 28 December 1994 (28.12.94), column 6, line 55 - column 7, line 47, figures 8-9	1-6
	--	
P,X	US 5717816 A (JILL MACDONALD BOYCE ET AL), 10 February 1998 (10.02.98), see "summary of the invention"	1-6
	--	

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

10 December 1998

14 -12- 1998

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Peder Gjervaldsaeter

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

03/11/98

International application No.

PCT/IB 98/00838

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9613128	A1	02/05/96	AU	692310 B	04/06/98
				AU	692311 B	04/06/98
				AU	692320 B	04/06/98
				AU	692321 B	04/06/98
				AU	3686795 A	15/05/96
				AU	3730195 A	15/05/96
				AU	3823395 A	15/05/96
				AU	3823895 A	15/05/96
				BR	9509384 A	18/11/97
				BR	9509385 A	30/09/97
				BR	9509386 A	16/09/97
				BR	9509387 A	16/09/97
				CA	2201707 A	02/05/96
				CA	2201709 A	02/05/96
				CA	2201710 A	02/05/96
				CA	2201711 A	02/05/96
				CN	1169229 A	31/12/97
				CN	1169230 A	31/12/97
				CN	1169231 A	31/12/97
				CN	1169232 A	31/12/97
				EP	0787401 A	06/08/97
				EP	0787402 A	06/08/97
				EP	0787403 A	06/08/97
				EP	0787409 A	06/08/97
				GB	9421206 D	00/00/00
				JP	10507886 T	28/07/98
				JP	10507887 T	28/07/98
				JP	10507888 T	28/07/98
				JP	10508163 T	04/08/98
				WO	9613121 A	02/05/96
				WO	9613122 A	02/05/96
				WO	9613123 A	02/05/96
EP	0631441	A2	28/12/94	JP	7023323 A	24/01/95
				JP	7050838 A	21/02/95
				JP	7193786 A	28/07/95
US	5717816	A	10/02/98	US	5673358 A	30/09/97
				US	5726711 A	10/03/98
				US	5729648 A	17/03/98
				US	5778143 A	07/07/98
				US	5805762 A	08/09/98